

Weight
Operation weight:
approximately 134 tons

Working height / reach
Maximum height: 42 mtr.
Maximum reach: 36 mtr.

STC HD 120D



It starts at the base:


Demolition at great height requires great precision and concentration from the operator: small movements at ground level are magnified at 40, 50, 60 meters height: Therefore, the rigidity of the machine itself is just as important as the smoothness of its controls. Rigidity is provided by custom built heavy duty frames. These important properties makes an STC HD-line machine easy to control, resulting in less operator fatigue, which pays off in more productive workdays.

Undercarriage Quick Connect

To increase the stability STC has developed a new generation of heavy duty demolition undercarriages, the Undercarriage Quick Connect (UQC). These minimize operator fatigue due to their high stiffness and robustness, yet easy to disassemble into manageable sections all within the 3.5m transport width limit. The undercarriages are equipped with hydraulic outriggers that can fold out and lift the machine of the ground. Then the machine can disassemble its own tracks and place them on trailers using an integrated winch system.

To ensure trouble free operation in shoreline works such as dredging, breaker construction or shipwreck demolition, the locking pins are hardened and chrome plated and slide in hardened and nitrated bushings with grooves. The grooves distribute grease and ensure that foreign particles can evade so they do not scratch and jam the pins.

Whether your business is at great height downtown, reaching out on the shores, or ripping up quays underwater, the STC UQC gets you easily on any jobsite and provides a stable, durable and universally suitable base to support your large demolition and infrastructural jobs.

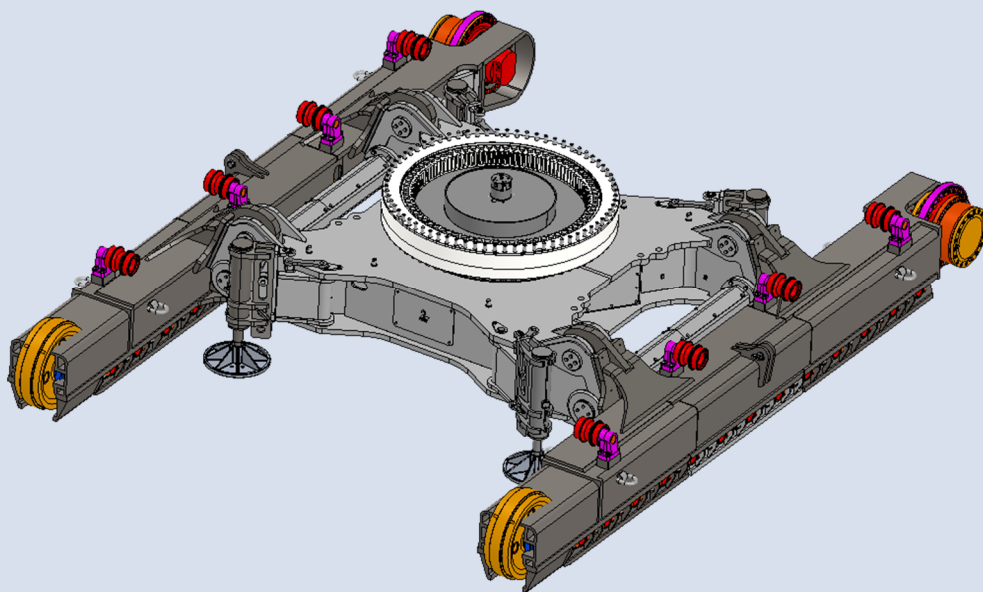




Upper frame


Industrial demolition is the most demanding line of work for an excavator; the pounding of heavy hydraulic hammers transmitting their vibrations to the base machine, big scrap shears throws them off balance, and trying to pry loose foundation substructures will test the limits of the machine.

The upper frame is reinforced to increase the design strength of the standard frame. Because of this the frame can carry larger ballast weights, yet dampen any vibration of the tools on the front end. This to maximize the lifespan of the frame itself, as well as the components installed on it.



Slew bearing

STC uses a custom made triple row roller bearing on all HD models, that are designed to last, even in the most demanding load set. The slew bearing provides stability to ensure a low but even wear and ample bolts are used to connect the bearing to the frames. Six greasing lines are fitted per roller row, which are centered to a common lubrication block.

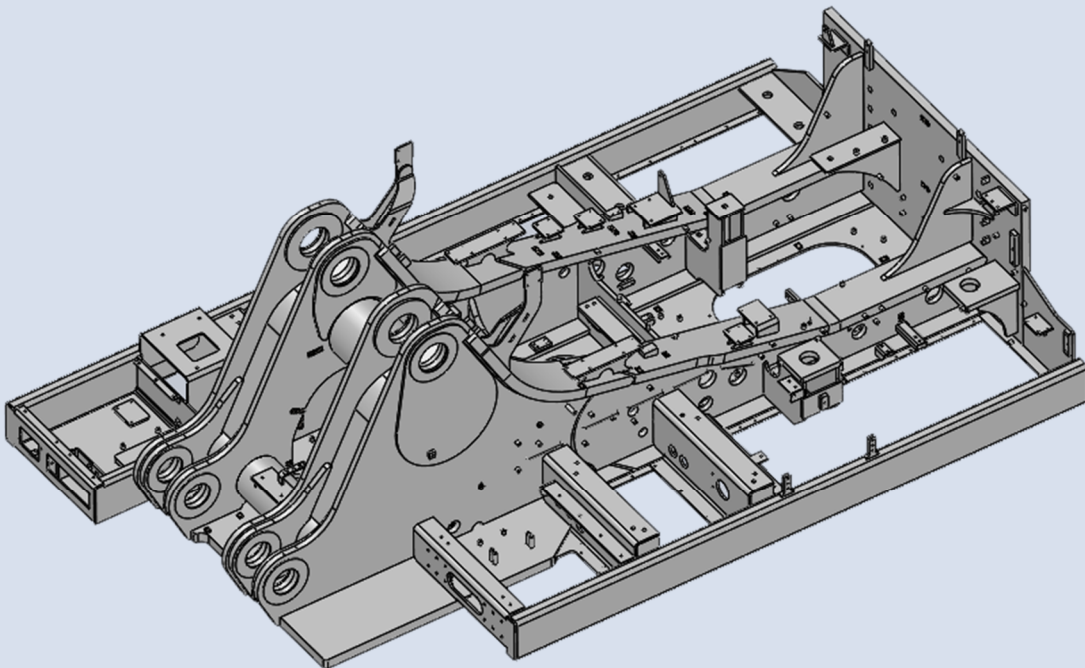



FOPS

The impact energy of a falling object increases exponentially with increased height. Therefore, STC designed FOPS cages that exceed the ISO 6165 FOPS standard and match the working height of its current demolition machines. When an object falls down, there is no need to panic. The safest place will then be in the cabin under the STC safety cage. To ensure perfect visibility, each slat is angled individually towards the operators eye level so that the % of sight of an STC heavy duty demolition cage is no less than the standard excavator FOPS cages.

Cabin tilt, lift

STC has built cab visibility improvement solutions since its inception. There are multiple solutions available like: Tilt cabins for high reach demolition, cabin lifts to look down over the edge of a construction pit or a combination of both, to ensure maximum versatility. Even on large machines that work in the horizontal plane, cab elevation increases the overview over the jobsite for the operator, enabling more precise and safe work with less fatigue. Armoured front glass is standard on our HD line, where the roof window is enlarged for extra comfort for the operator. A window wiper with parallel arm is standard as well.






Front

Our booms are designed based on 30 years of experience, combined with the relevant scientific research on metal fatigue and metal processing. Finite Element Analysis is used to gain insight. STC booms are designed to last the lifetime of the machine, though it is not uncommon for customers to buy a new base machine, and reuse the existing STC booms.

Multiple booms are available with different length for the STC HD 120D

- High Reach Demolition 42 m
- Triple Excavation 22 m
- Triple Excavation 20 m
- 2PC Straight
- 2PC Bend

The STC HD line comes standard with a Boom Quick Connect (BQC). This ensures easy disassembly for transport, but also makes it possible to utilize multiple configurations. It is possible to use a high reach demolition boom or a triple boom in several reach and tool weight




Hydraulics

STC expands the main hydraulic valves, preferably with additional sections from the OEM. Smaller functions such as BQC pins are controlled by standardised industrial Cetop valves. Due to the increasing complexity of hydraulic systems, you cannot just plug in any valve section. With decades of experience with system modifications, we install the system extension with regard to minimal power loss and heat generation and the best controllability.

configurations. These can be combined with an extension piece, or even a long reach excavating boom, or a material handler boom can be fitted. All these configurations fit on the same base machine due to the use of the BQC. The customer can order the machine with the different front configurations or maybe even order one later when another configuration is needed.

STC has been one of the pioneers in BQC systems. Its current version incorporates a lot of field experience, which makes it one of the most durable systems in the market. Hollow pins with small hydraulic cylinder inside are mounted on the boom. The BQC pins are hardened and chromed and the nitrated bushings with grease grooves provide very high wear resistance, ensuring a lasting tight fit. The in-pin design provides a clean look because the cylinders are not visible on the outside. This also minimises the risk of damage during work or transport.

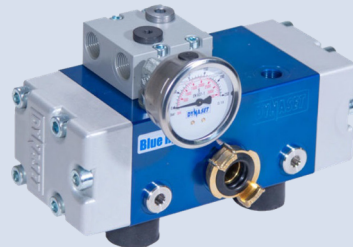

Dust suppression (optional)

STC dust suppression systems consist of a hydraulically driven high pressure water pump, pushing water through stainless steel water lines mounted on the boom. Pressure washer nozzles are mounted on each side of the stick, to atomize water in the working area. A large filter is installed to clean the water when no domestic water supply is available. To prevent cavitation damage from insufficient water supply to the pump, the system is monitored by a pressure switch that switches off the pump when water pressure in the supply line drops below 0.5 bar.




Load Moment Indicator

The machine can be equipped with a Load Moment Indicator (LMI), which recognises the assembled boom configuration by individual ID codes of each inclination sensor. This ensures that operators have a clear indication of where the stability limit is, so they can take the machine to its limits without taking undue risks. Because boom parts are recognised by the LMI system, hydraulic joystick and valve sensitivity can be automatically changed, to get the correct speed and feel whether you have the high reach demolition boom attached to work controlled at great height, or that a short triple boom is mounted to dig up concrete slabs at full power.

Service

Regular maintenance can be done by local Cat technicians as all regular service parts are identical to Cat parts. STC wear parts can be supplied to the local Cat dealer for installation. But when a complex technical failure occurs, STC specialists can provide backup worldwide to get you back on the job.

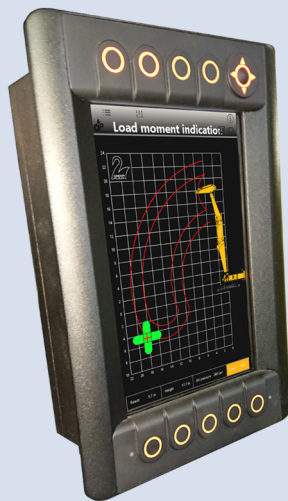



ENGINE:

Engine model	Cat C18	
Engine Power – ISO 9249	404 kW	542 hp
Engine Power – ISO 14396	405 kW	543 hp
Bore	145 mm	6 in
Stroke	183 mm	7 in
Displacement	18.1 L	1,105 in ³

HYDRAULIC SYSTEM:

Main System – Maximum Flow – Implement	1064 L/min (x2 pumps)	281 gal/min
Maximum Pressure – Equipment – Implement	37 000 kPa	5,366 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	31 000 kPa	4,496 psi

SWING MECHANISM:

Swing Speed	6.3 rpm	
Maximum Swing Torque	362 kN·m	267,333 bf-ft

WEIGHTS:

Operating Weight	134 000 kg	295 000 lb
------------------	------------	------------

SERVICE REFILL CAPACITIES:

Fuel Tank	1220 L	322 gal
Cooling System	71 L	19 gal
Engine Oil (with filter)	67 L	18 gal
Swing Drive	24 L	6 gal
Final Drive (each)	20 L	5 gal
Hydraulic Tank (including suction pipe)	650 L	172 gal
DEF Tank	80 L	21 gal


DIMENSIONS:

Shipping Height (top of cab)	4000 mm	13'1"
Tail Swing Radius	5400 mm	17'9"
Track Length	7450 mm	24'5"
Track Length to Center of Rollers	6170 mm	20'3"
Track Gauge	4100 mm	13'5"

STC HD 120D

5-1678-001


HRD 42 mtr.

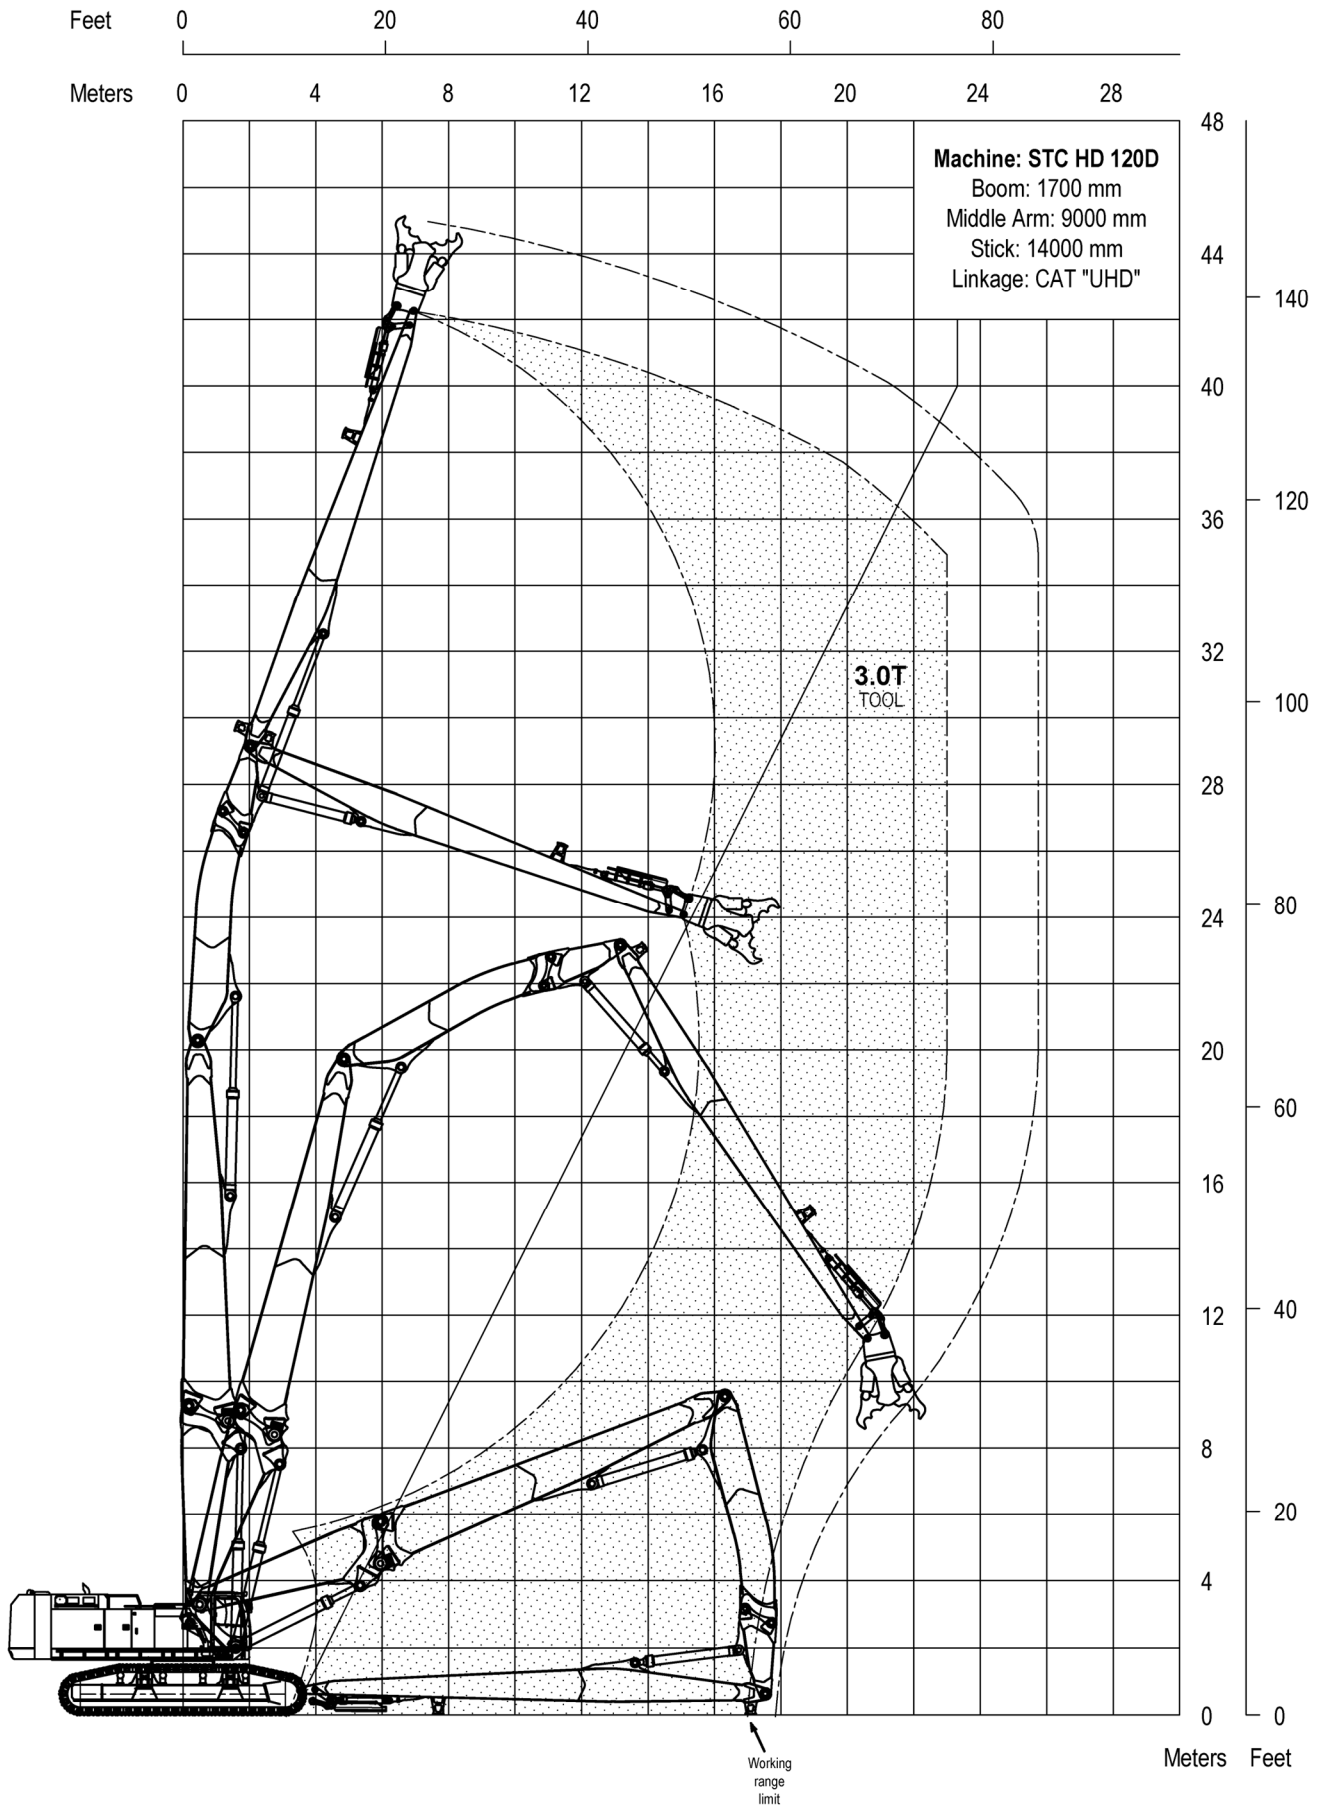

STC HD 120D

Triple 22 mtr.

5-1678-101

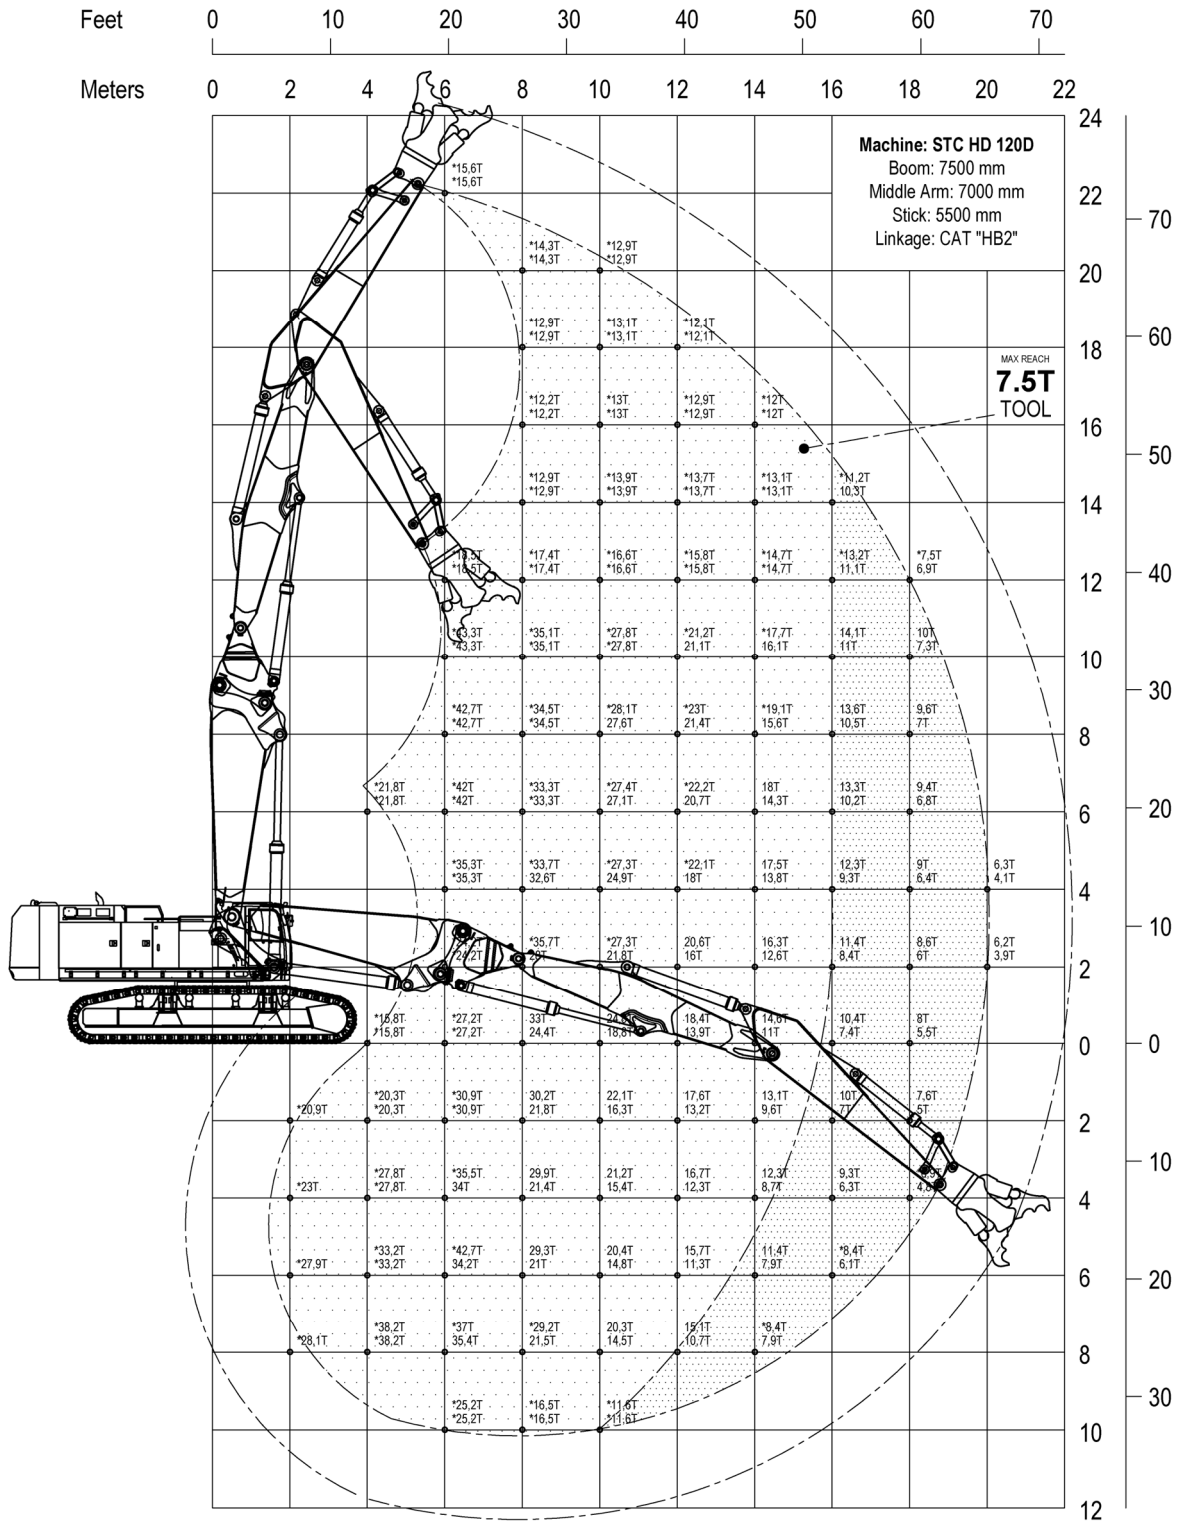

The upper number indicates the maximum load over the front, the lower number over the side.

The numbers with a * indicates 87% of the hydraulic capacity, and the remaining numbers 75% of the tipping load. Pressure: 350 bar


The right column shows the load at max. reach of the machine

Meters Feet

STC HD 120D


Triple 20 mtr.

5-1678-201

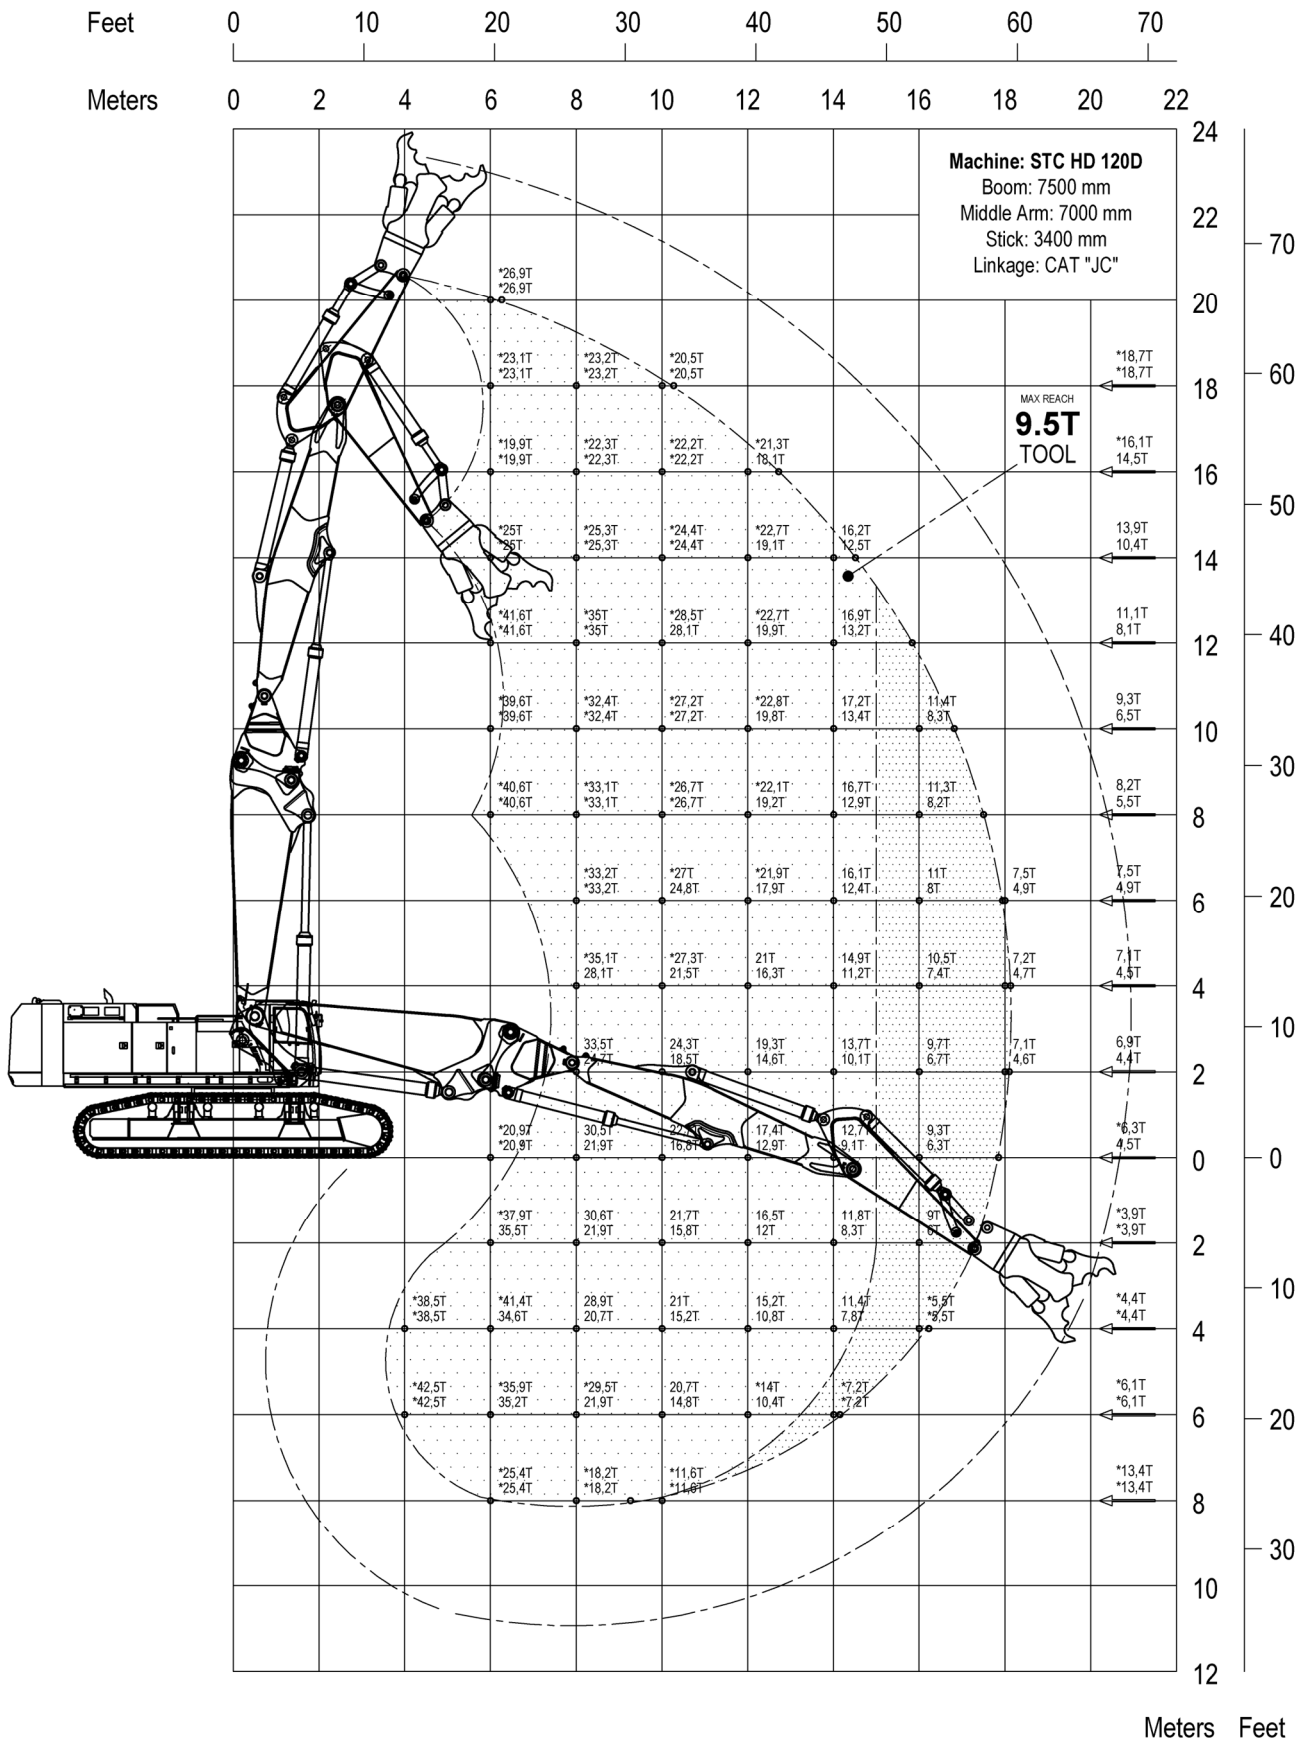


The upper number indicates the maximum load over the front, the lower number over the side.
 The numbers with a * indicates 87% of the hydraulic capacity, and the remaining numbers 75% of the tipping load. Pressure: 350 bar
 The right column shows the load at max. reach of the machine

2PC Straight

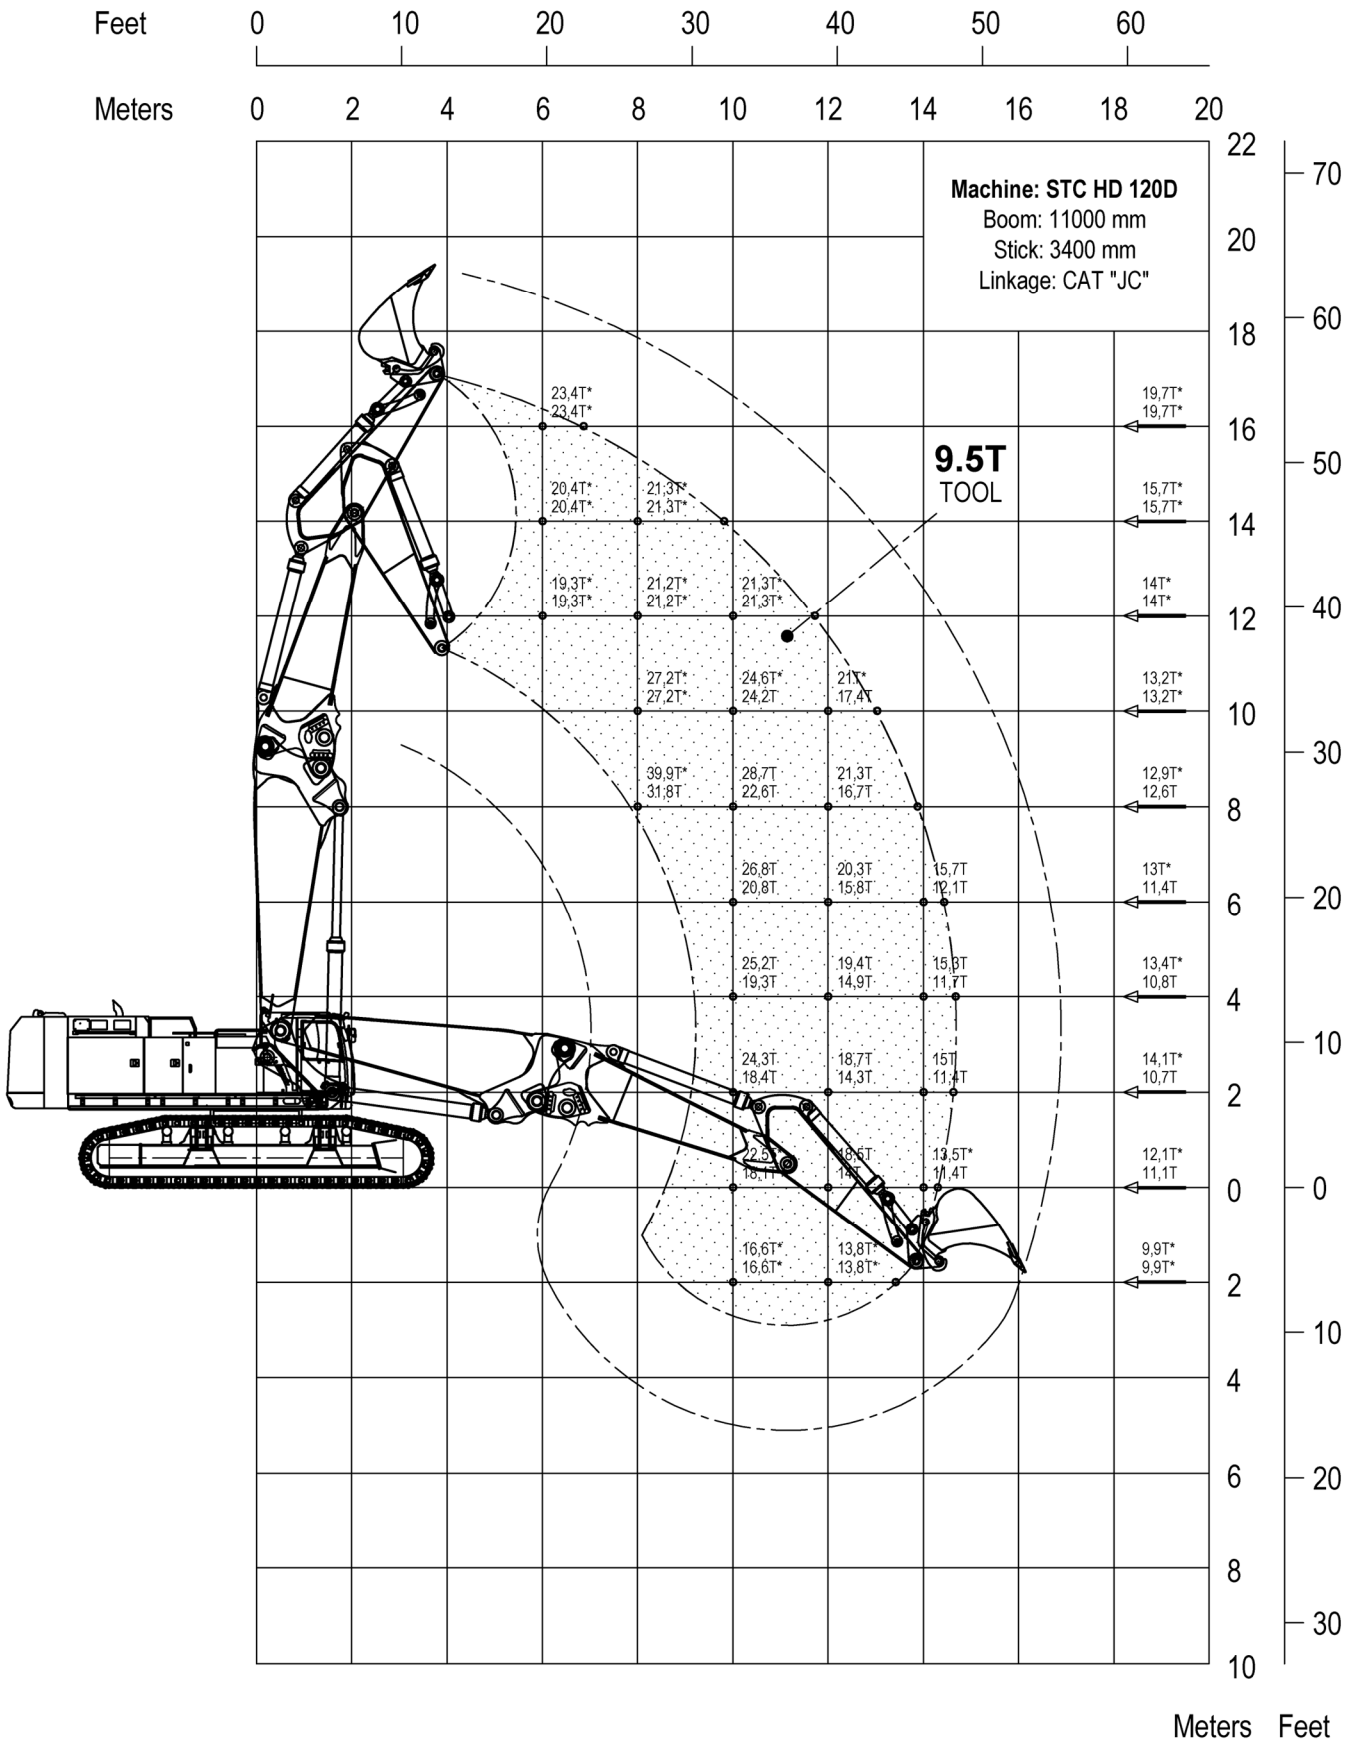


The upper number indicates the maximum load over the front, the lower number over the side.
 The numbers with a * indicates 87% of the hydraulic capacity, and the remaining numbers 75% of the tipping load.
 The right column shows the load at max. reach of the machine

2PC Bend

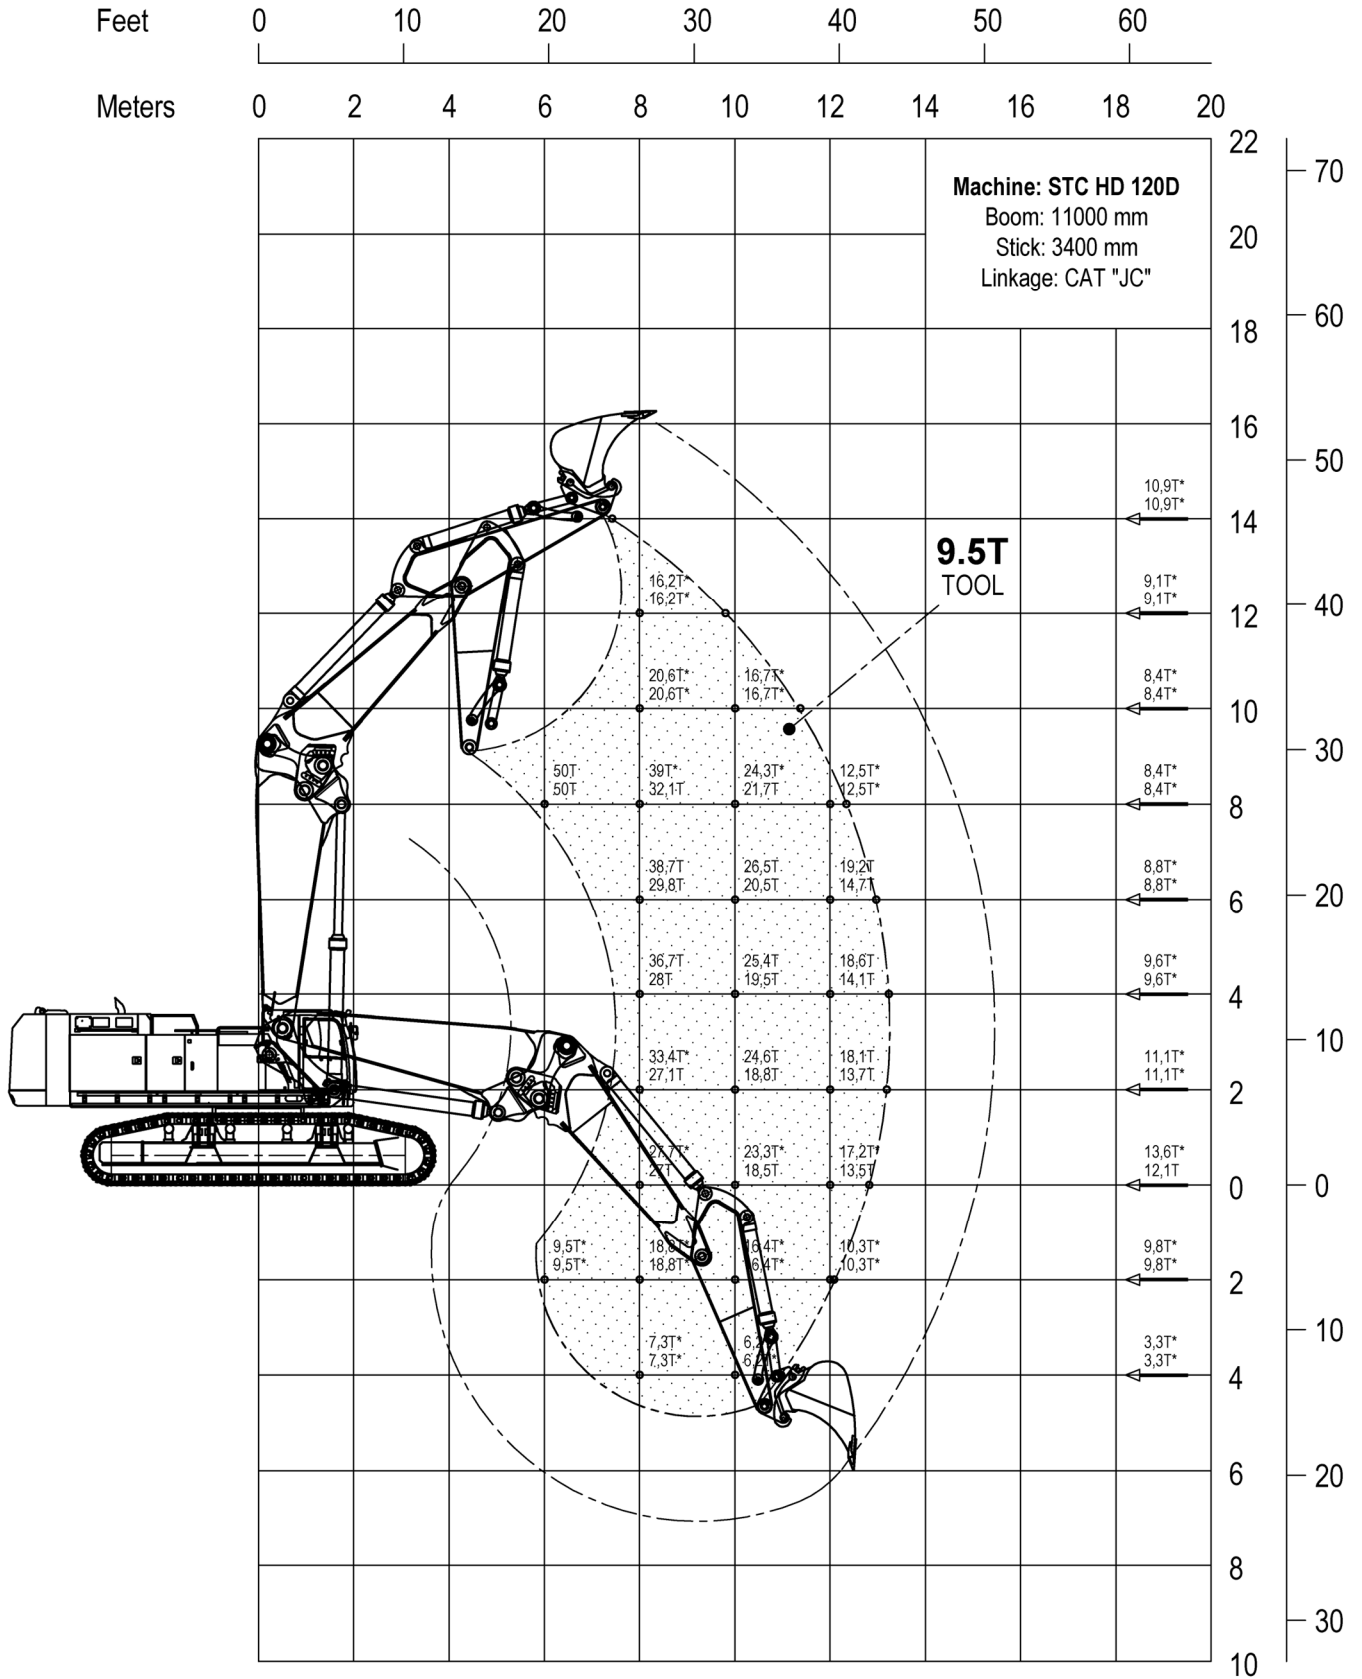

The upper number indicates the maximum load over the front, the lower number over the side.
 The numbers with a * indicates 87% of the hydraulic capacity, and the remaining numbers 75% of the tipping load.
 The right column shows the load at max. reach of the machine

Configurations

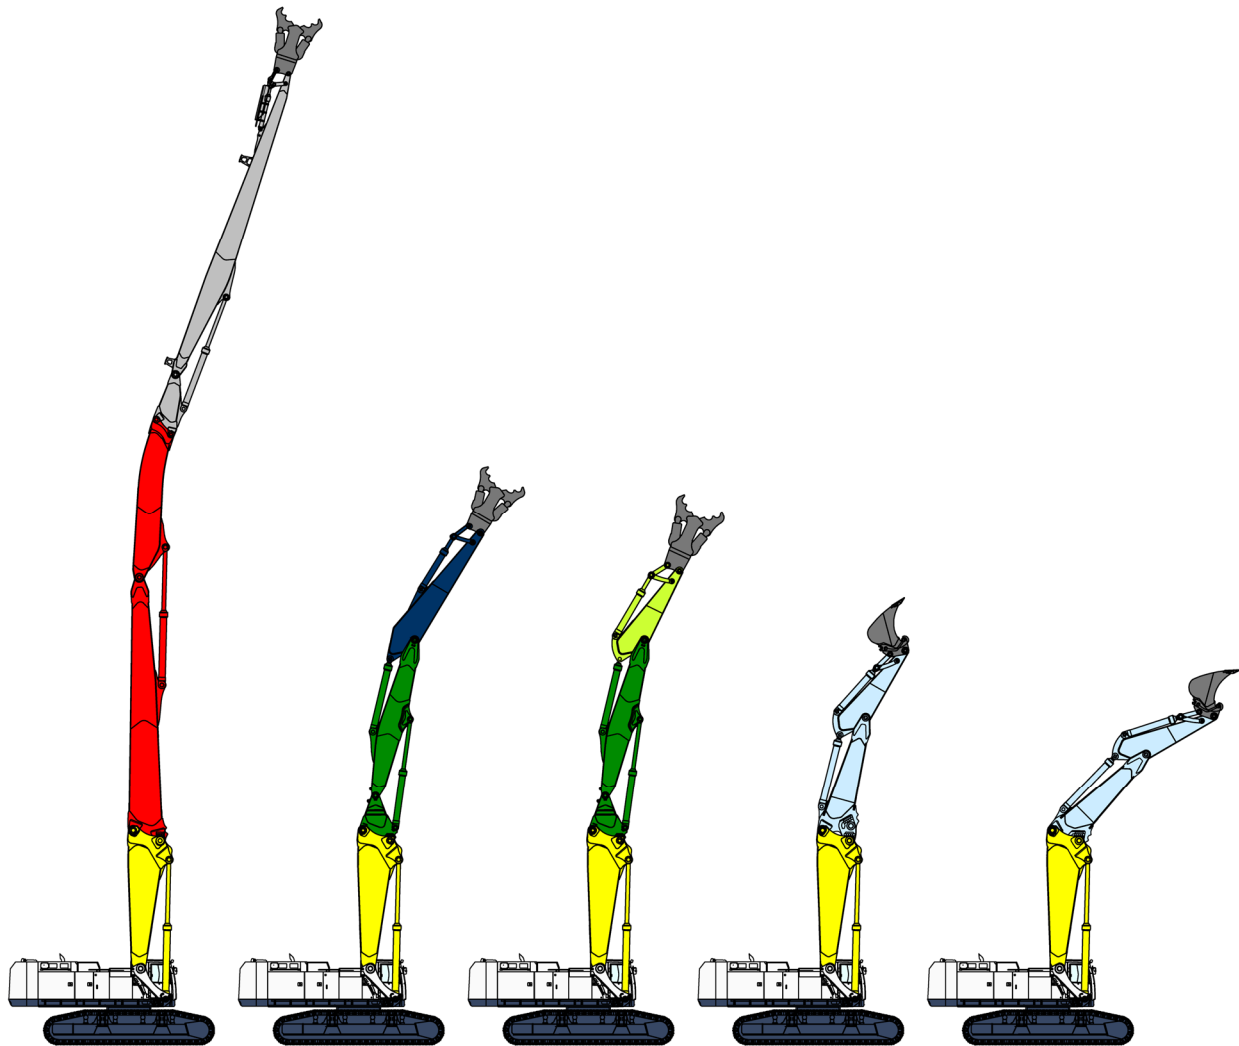

**42 MTR.
HRD**

**22 MTR.
TRIPLE**





**20 MTR.
TRIPLE**

**17 MTR.
2PC STRAIGHT**



**15 MTR.
2PC BEND**

HRD Stick 14000mm	●				
HRD Middlearm	●				
Triple Stick 5500mm		●			
Triple Stick 3400mm			●		
Triple Middlearm		●	●		
2PC Digging				●	●
Stubboom	●	●	●	●	●
Toolweight	3T / 6600 lb Crusher 2.4T / 5300 lb Shear	7.5T / 16500 lb Crusher 6T / 13200 lb Shear	9.5T / 20900 lb Crusher 7.6T / 16700 lb Shear	9.5T / 20900 lb Crusher 7.6T / 16700 lb Shear	9.5T / 20900 lb Crusher 7.6T / 16700 lb Shear

Transport table

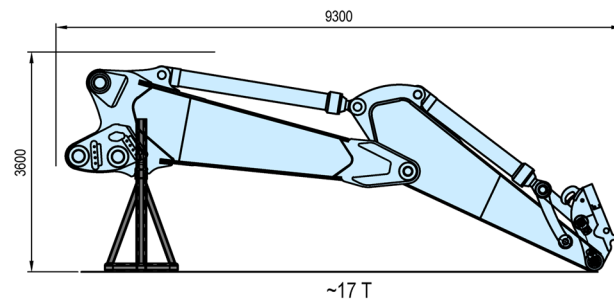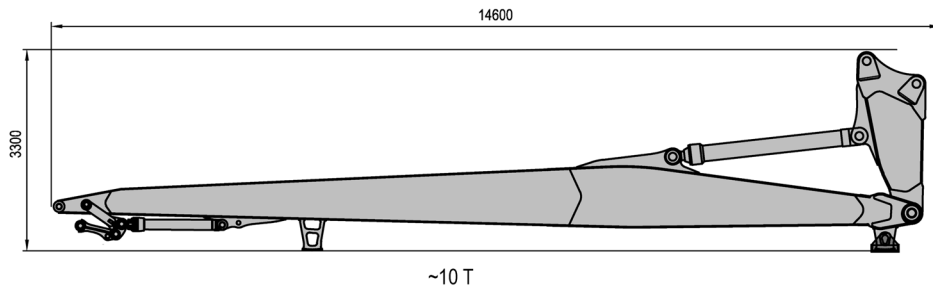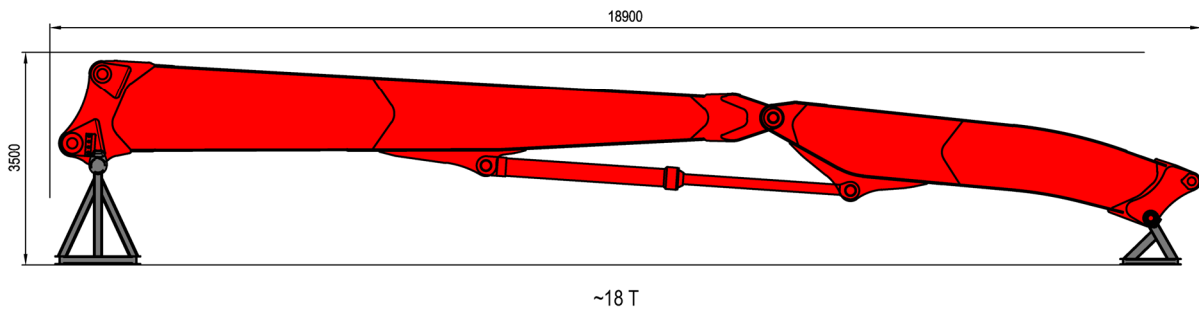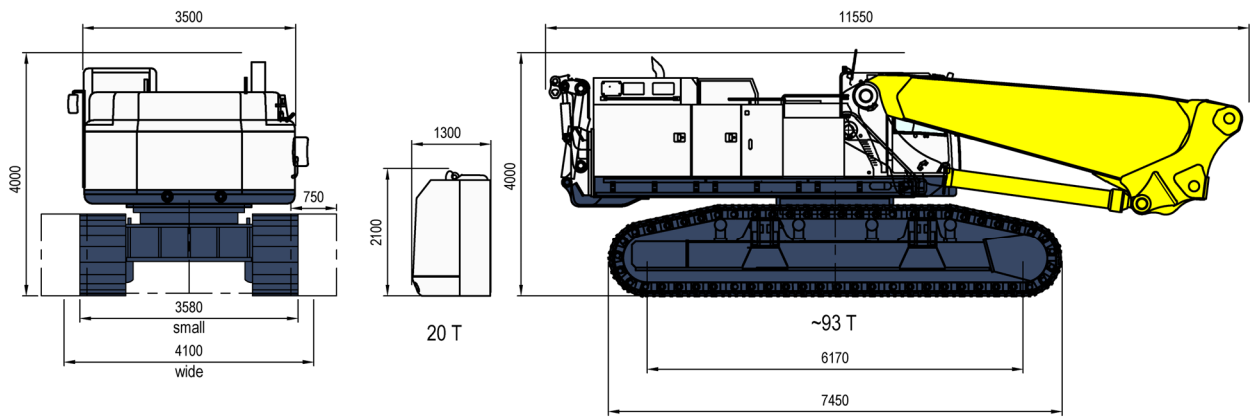

Transport Table

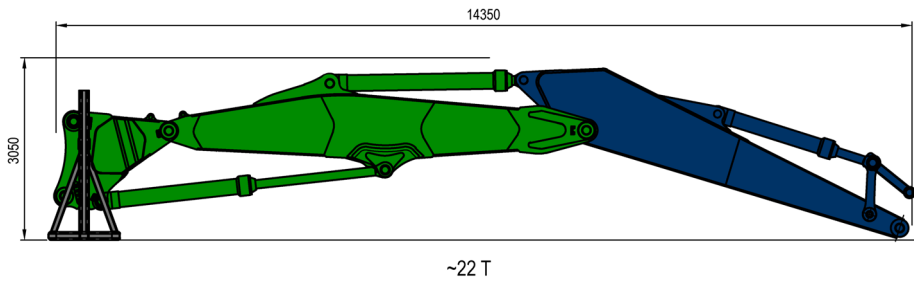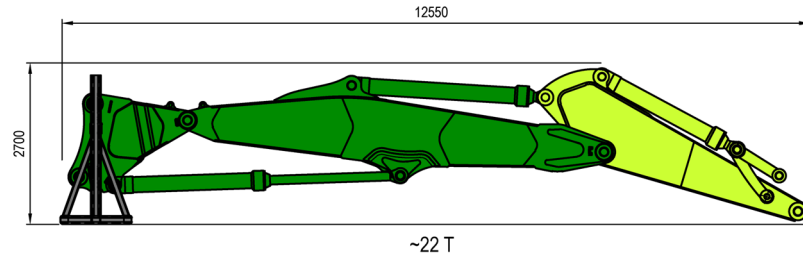

*Specifications are subject to change without notice.
No rights can be derived from the technical specifications.*

STC
Vosmatenweg 3
7742 SX Coevorden

The Netherlands
info@stcbv.nl
+31 (0)524 525 375

stcbv.nl